

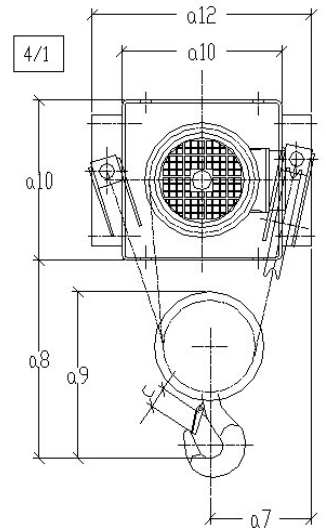
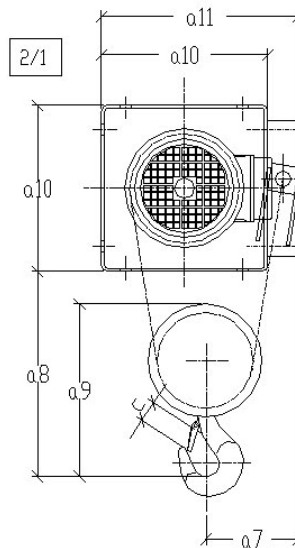


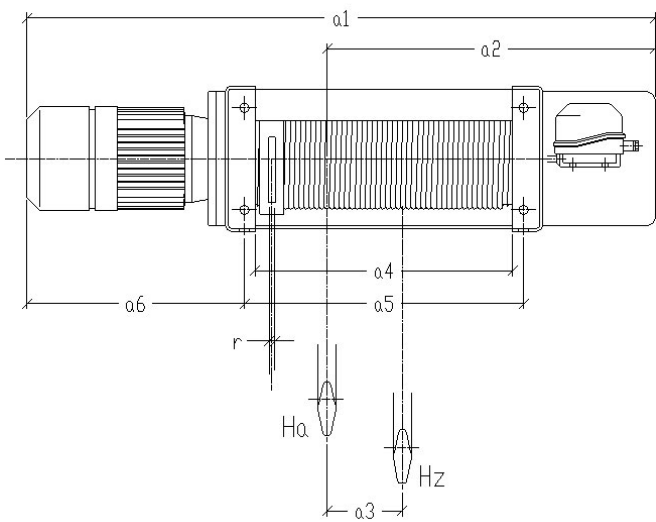

# BW Paranco Elettrico a Fune Tabella dimensionale in mm

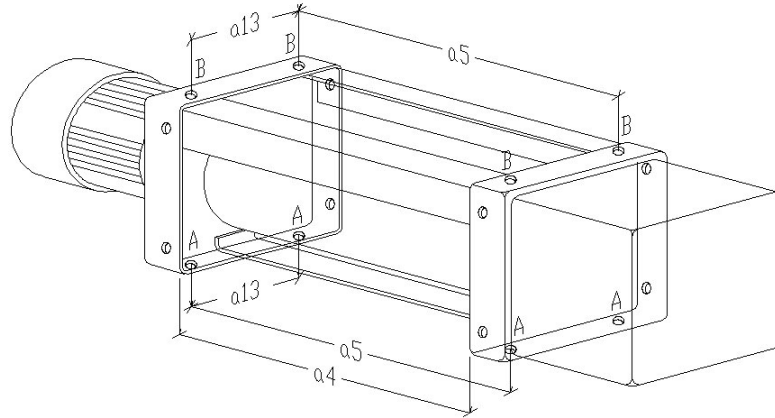

type	falls	a1		a2		a3		a4		a5		a6	a7	a8	a9	a10	a11	a12	a13	r	c
		H1	H2	H1	H2	H1	H2	H1	H2	H1	H2										
BW1	2/1	1338	1608	670	940	200	335	480	750	520	790	573	150	460	400	270	320	370	190	8	40
	4/1	1338	1608	615	885	115	200	480	750	520	790	573	170	420	360	270	320	370	190	8	50
BW2	2/1	1378	1638	670	930	195	325	500	760	540	800	583	180	580	510	320	380	440	220	10	50
	4/1	1378	1638	620	880	100	170	500	760	540	800	583	205	510	435	320	380	440	220	10	56
BW3	2/1	1730	2000	825	1095	245	380	670	940	720	990	740	240	700	630	420	500	580	290	13	56
	4/1	1730	2000	730	1000	130	200	670	940	720	990	740	265	610	535	420	500	580	290	13	71
BW4	2/1	1890	2260	880	1270	255	450	610	1070	680	950	920	305	880	780	520	640	760	330	16	71
	4/1	1890	2260	745	1135	130	240	610	1070	680	950	920	340	800	700	520	640	760	330	16	90